



PFT MINICUT 140 mm in case



PFT MINICUT 230 mm in case



Thanks to electronic power controller cutting temperature is continuously adjustable.



## Hot wire cutting tool PFT MINICUT

PFT MINICUT 140 mm in case	Part no. 00 02 06 57
PFT MINICUT 140 mm in cardboard box	Part no. 00 02 02 90
PFT MINICUT 230 mm in case	Part no. 00 23 12 84

The practical hot wire cutting tool is the practical addition to the PFT CUTMASTER with a cutting height up to 1,350 mm and a cutting depth of 310 mm, depending on version.

### Delivery contents – PFT MINICUT 140 mm:

Hot wire cutting tool with approx. 3 m power cable, hook, cleaning brush and operating instructions in case

### Delivery contents – PFT MINICUT 230 mm:

Hot wire cutting tool with approx. 3 m power cable, hex driver, cleaning brush and operating instructions in case

### Spare parts:

Bezel, 140 mm	Part no. 00 02 04 10
Bezel round, 230 mm	Part no. 00 23 80 46
Bezel plane, 230 mm	Part no. 00 28 45 20

### Field of application:

The powerful device is just perfect for building trade, industry and design. For boards up to a thickness of 140 mm or 230 mm. The PFT MINICUT 230 mm with electronic power controller for optimal adjustment of cutting temperature.

### Advantages at a glance:

- ▶ ready to cut in 10 seconds
- ▶ no dust
- ▶ insulated for your safety
- ▶ no statically charging
- ▶ bezel made of stainless steel can be changed easily

### Technical data

Description:	PFT MINICUT 140 mm	PFT MINICUT 230 mm
Power connection:	230 V, 50 Hz	230 V, 50 Hz
Power supply:	110 W	max. 230 W
While cutting:	12 s on / 48 s off	12 s on / 48 s off
Temperature of cutting:	max. 500°C	max. 500°C
Weight with cutting edge:	approx. 1 kg	approx. 0.6 kg

PFT – THE FLOW OF PRODUCTIVITY



Knauf PFT GmbH & Co. KG  
P.O. Box 60 97343 Iphofen Germany  
Phone +49 9323 31-760  
Fax +49 9323 31-770  
info@pft-iphofen.de  
www.pft.eu

Recommended accessories see on back side ►►

**NEW**

## Accessories for the practical hot wire cutting tool PFT MINICUT 230 mm



PFT MINICUT 230 mm  
with section-adapter



Free selectable forms, e. g. slot  
cuttings caused by simple bending  
of the cutting strap.

## PFT Section-adapter


Part no. 00 28 55 29

### Required accessories:

Cutting strap (replacement), 1 m      Part no. 00 28 55 27

### Functional description:

The new PFT section-adapter for hot wire cutting tool PFT MINICUT 230 mm can be used to cut individual notches out of insulation panels. The width and depth of the notches, for example for empty conduit, can be chosen freely because of the flexible cutting strap. Even very special forms like round arches, cuttings for rafters and much more can be made with the robust cutting strap.

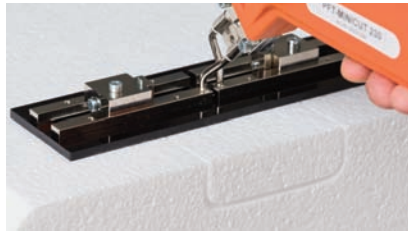

Here: A cutting for rafters ...



... for laying a empty conduit system.